


# Rechargeable Battery Module

**E42.1** for E30.1 - E40.1

To power on the controller you need to install the Engino® rechargeable battery on the back of the device. You will need a cross-head screw driver to remove the battery cap. The battery can be charged through the micro USB cable while having the device switched on.



3.7V 2000mAh Li-ion  
Rechargeable Battery

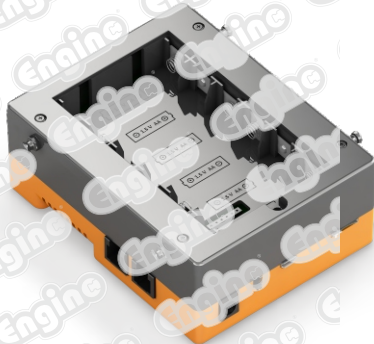

Back side of Controller



**Safety guidelines:** Do not overcharge the battery. Do not mix alkaline, standard or rechargeable batteries. Non-rechargeable batteries are not to be re-charged. Do not mix old with new batteries. Remove dead or old batteries from the device if they will not be used for a long time. Never dispose off batteries in fire. Supply terminals are not to be short circuited.



**Thank you for accessing our free  
version of this resource.**

To continue reading and gain access to the full version,  
please login and register your product.

We appreciate your interest and hope  
you find our resources valuable.

**Login or Register**

