

Rechargeable Battery Module

E42.1 for E30.1 - E40.1

To power on the controller you need to install the Engino® rechargeable battery on the back of the device. You will need a cross-head screw driver to remove the battery cap. The battery can be charged through the micro USB cable while having the device switched on.

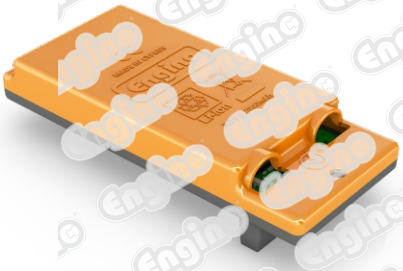

3.7V 2000mAh Li-ion Rechargeable Battery

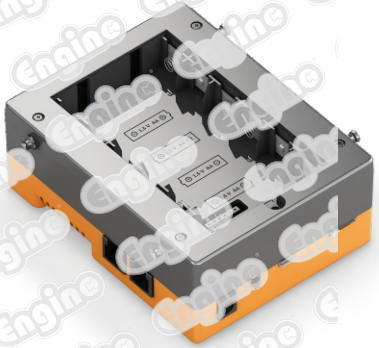

Back side of Controller

Safety guidelines: *Do not overcharge the battery. Do not mix alkaline, standard or rechargeable batteries. Non-rechargeable batteries are not to be re-charged. Do not mix old with new batteries. Remove dead or old batteries from the device if they will not be used for a long time. Never dispose off batteries in fire. Supply terminals are not to be short circuited.*

Thank you for accessing our free version of this resource.

To continue reading and gain access to the full version, please login and register your product.

We appreciate your interest and hope you find our resources valuable.

Login or Register



© Copyright 2023 Engino-Net Limited: For Private use only. It is prohibited to edit, translate, reproduce or use this material for commercial purpose.